

875 Watt Pulse Start Lamp

41686

DATA SHEET



UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

MP 875W/C/BU/BT37/PS/737

GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M166/O
Bulb Shape	BT37
Base Type	Mogul (EX39)
Bulb Finish	Coated
Rated Life	26000 hours
Operating Position	Base Up $\pm 15^\circ$

ELECTRICAL

Lamp Watts	875
Lamp Oper. Voltage (Nom.)	250

SUSTAINABILITY


Mercury Amount (mg)	107.5
Picograms of Hg per Mean Lumen Hour	56

PHOTOMETRIC


Initial Lumens	93000
Lumens Per Watt	106
Lamp Lumen Depreciation (LLD)	0.80 (80%) @ 8000
Correlated Color Temperature	3700K
Chromaticity Coordinates (CIE-x,y)	.395 .390
Color Rendering Index (CRI) R_a	70

PHYSICAL

Bulb Diameter	4.6" (120mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	N/A
Max. Base Temperature ($^\circ\text{C}$)	250
Max. Bulb Temperature ($^\circ\text{C}$)	450
Socket Pulse Rating (KV)	4
Luminaire Type	Open / Enclosed Rated



BT37




Dia. = 4.6" (120mm)
MOL = 11.5" (292mm)
LCL = 7.0" (178mm)
Base = Mogul (EX39)


NOTES

- Lamp performance ratings published in this data sheet are based upon operation with magnetic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Minimum Starting Temperature: $-40^\circ\text{C}/^\circ\text{F}$.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).


Spectral Distribution

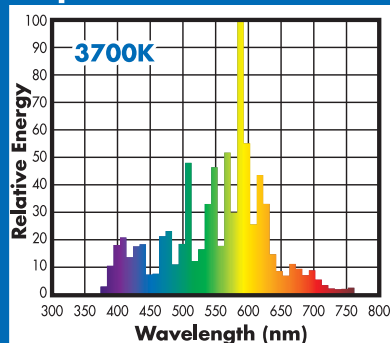

Lumen Maintenance

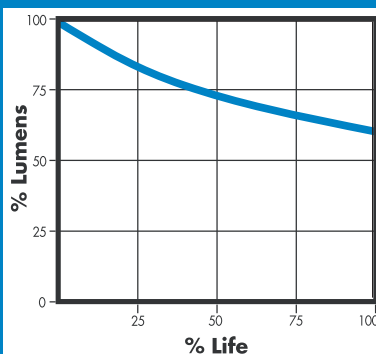

Lamp Mortality

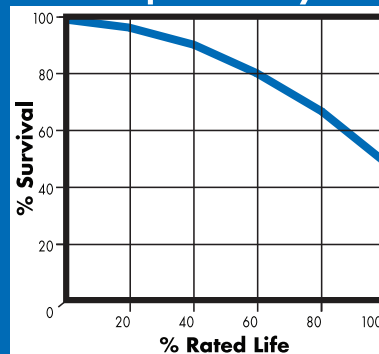

(800) 451-2606

6675 Parkland Blvd., Suite 100
Solon, Ohio 44139 USA

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.