

# 1000 Watt Pulse Start Lamp

# 71722 DATA SHEET



**UNI-FORM**  
PULSE START METAL HALIDE LIGHTING SYSTEMS

## MS 1000W/BU/BT37/PS/740

### GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M141/E
Bulb Shape	BT37
Base Type	Mogul (E39)
Bulb Finish	Clear
Rated Life	12000 hours
Operating Position	Base Up $\pm 15^\circ$

### ELECTRICAL

Lamp Watts	1000
Lamp Oper. Voltage (Nom.)	263

### SUSTAINABILITY

Mercury Amount (mg)	151.0
Picograms of Hg per Mean Lumen Hour	146

### PHOTOMETRIC


Initial Lumens	115000
Lumens Per Watt	115
Lamp Lumen Depreciation (LLD)	0.75 (75%) @ 4800
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI) $R_a$	68

### PHYSICAL


Bulb Diameter	4.6" (120mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	81.5 mm
Max. Base Temperature ( $^\circ\text{C}$ )	250
Max. Bulb Temperature ( $^\circ\text{C}$ )	450
Socket Pulse Rating (KV)	4
Luminaire Type	Enclosed Rated

### NOTES




- Lamp performance ratings published in this data sheet are based upon operation with magnetic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Minimum Starting Temperature:  $-40^\circ\text{C}/^\circ\text{F}$ .
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).



**BT37**



Dia. = 4.6" (120mm)  
MOL = 11.5" (292mm)  
LCL = 7.0" (178mm)  
Base = Mogul (E39)

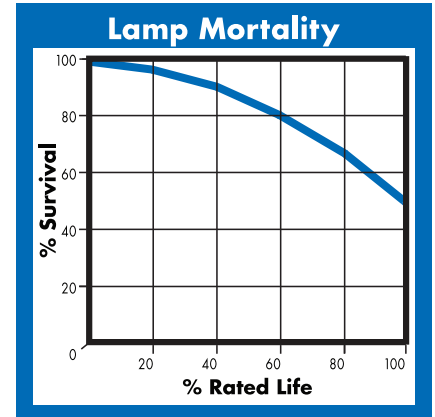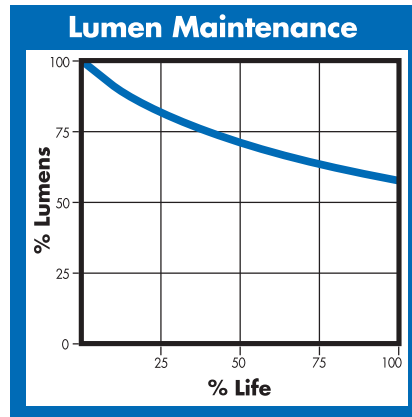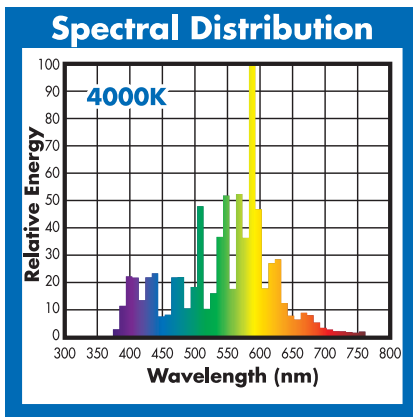

**(800) 451-2606**

6675 Parkland Blvd., Suite 100  
Solon, Ohio 44139 USA

E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)

**VentureLighting.com**

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30  
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.