


# 150 Watt Pulse Start Lamp

# 95150 DATA SHEET



Natural White®



EDX17



Dia. = 2.1" (54mm)  
MOL = 5.4" (138mm)  
LCL = 3.4" (86mm)  
Base = Medium (E26)

## MP 150W/U/PS/EM/950

### GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M102/O
Bulb Shape	EDX17
Base Type	Medium (E26)
Bulb Finish	Clear
Rated Life	20000 hours
Operating Position	Universal

### PHOTOMETRIC

Initial Lumens	11100
Lumens Per Watt	74
Lamp Lumen Depreciation (LLD)	0.90 (90%) @ 8000 hours
Correlated Color Temperature	5000K
Chromaticity Coordinates (CIE-x,y)	.346 .359
Color Rendering Index (CRI) $R_a$	90+

### PHYSICAL

Bulb Diameter	2.1" (54mm)
Max. Overall Length (MOL)	5.4" (138mm)
Light Center Length (LCL)	3.4" (86mm)
Effective Arc Length	15.7mm
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	450
Socket Pulse Rating (KV)	4.5
Luminaire Type	Open / Enclosed Rated

### ELECTRICAL




Lamp Watts	150
Lamp Oper. Voltage (Nom.)	95

### SUSTAINABILITY

Mercury Amount (mg)	4.8
Picograms of Hg per Mean Lumen Hour	24

### NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Performance ratings of Universal lamps are based upon Vertical ( $\pm 15^\circ$ ) operation.
- Minimum Starting Temperature:  $-40^\circ\text{C}/^\circ\text{F}$ .
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (2.1).

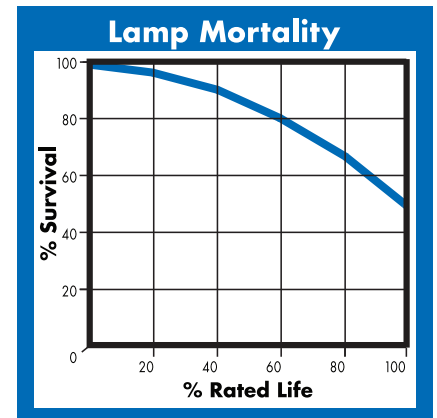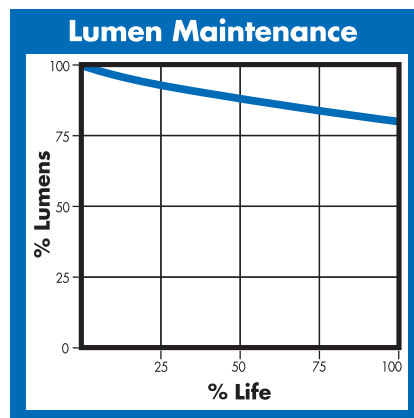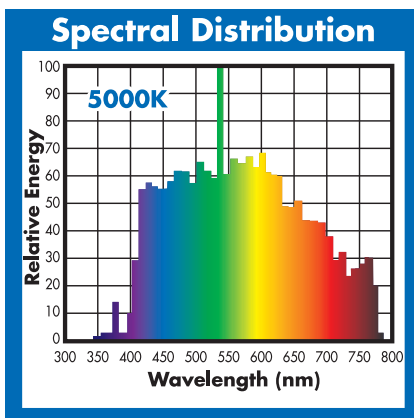

(800) 451-2606

6675 Parkland Blvd., Suite 100  
Solon, Ohio 44139 USA

E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)

[VentureLighting.com](http://VentureLighting.com)

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30  
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.